



On The Effectiveness Of The Use Of Environmentally Friendly Systems Of Small-Sized Irrigation In The Conditions Of Mountain-Irrigated Agriculture In Azerbaijan(On The Example Of The Guba-Khachmas Zone)

Prof. Dr. Z.H. Aliev

Institute Of Soil Science And Agrochemistry Of NAS Of Azerbaijan

Journal Website:
<http://usajournalshub.com/index.php/tajabe>

Copyright: Original content from this work may be used under the terms of the creative commons attributes 4.0 licence.


ABSTRACT

The results of the study revealed that the mismatch intensity rain rate of water absorption into the soil formation of a surface relief and soil erosion, uneven and shallow soaking imperfection open irrigation system at a superficial irrigation, the need for different irrigation methods in the growing and not growing periods, low coefficient land utilization, high cost of irrigation and other features are, to a certain extent in conflict with the requirements of watering cultivated with techniques for / of crops in an area at the deep groundwater. The necessity of different methods of irrigation in different periods of the growing season of plants has been substantiated. Low land utilization rate, high cost of irrigation and other features that contradict the requirements of irrigation cultivated using methods of growing crops in the area of deep groundwater are indicated.

KEYWORDS

Irrigation interval, irrigation, water capacity, groundwater, loam, count unit, slope, soil fertility.

INTRODUCTION



Recently, the Government of the Republic of Azerbaijan has been paying considerable attention to the development of one of the Guba-Khachmas zone, where in recent years numerous specialized farming and individual farms for the production of fruits and vegetables have been organized.

At present, in the Guba-Khachmas region, irrigation using the furrow method and in places with built-in stationary pulsed sprinkler devices of self-oscillating action (SIMDAD) from a closed network is used in the Guba-Khachmas zone for irrigation of vegetables and fruit trees.

The use of irrigation methods existing in this region (furrow irrigation and or conventional irrigation) under the conditions under consideration often leads to soil erosion.

One of the ways to increase the efficiency of stationary sprinkler systems on steep slopes is the introduction of technology and technical means of low-intensity irrigation, which could reduce construction costs and completely eliminate soil erosion.

For this purpose, it is necessary to apply appropriate ecologically acceptable equipment, which should provide the following multi-intensive long-term impact on the plant, soil and surface air layer by reducing the intensity of water supply (I) and bringing its value closer to the intensity of water consumption (E).

main factors in the intensification of agriculture, irrigation reclamation.

The long-term program for its development provides as an extension of the state of existing irrigation systems. One of the promising areas in Azerbaijan for the cultivation of vegetables, fruits, etc. is the

$$\text{And} \quad \leq \quad (i-100) \quad \text{E};$$

(1)

To the foregoing, synchronous sprinkling is most suitable.

Pulse sprinkling systems operate in a semi-automatic mode and during continuous operation the daily water supply is 96 m³ / ha, which is almost three times higher than the average daily water consumption rate of an agricultural field in this zone.

Along with other regions of the republic in the conditions of the Guba and Khachmas districts under the leadership of Prof. B.G. Aliyev, employees of the Research Institute "Erosion and Irrigation" in the period 2005-2007 targeted research was conducted using pulsed sprinkling of self-oscillating action. It was found that the frequency of irrigation and the intensity of water supply affect the productivity of the use of natural rainfall. Fig. one.

Throughout all studies conducted in the period 2005-2007 At the production facilities of the Cuban Regional Agrarian Center of Science (RACS), the Ministry of Agriculture supplied water by evaporation taking into account productively used precipitation, and in the control variant, the calculated irrigation rate for the lower threshold of soil moisture was 80% PPV.

In this regard, the self-oscillating pulsed irrigation systems (hereinafter SIDAD), introduced on an area of 2.8 hectares, make it

possible to provide water supply to the irrigated area up to 96 m³ / ha.

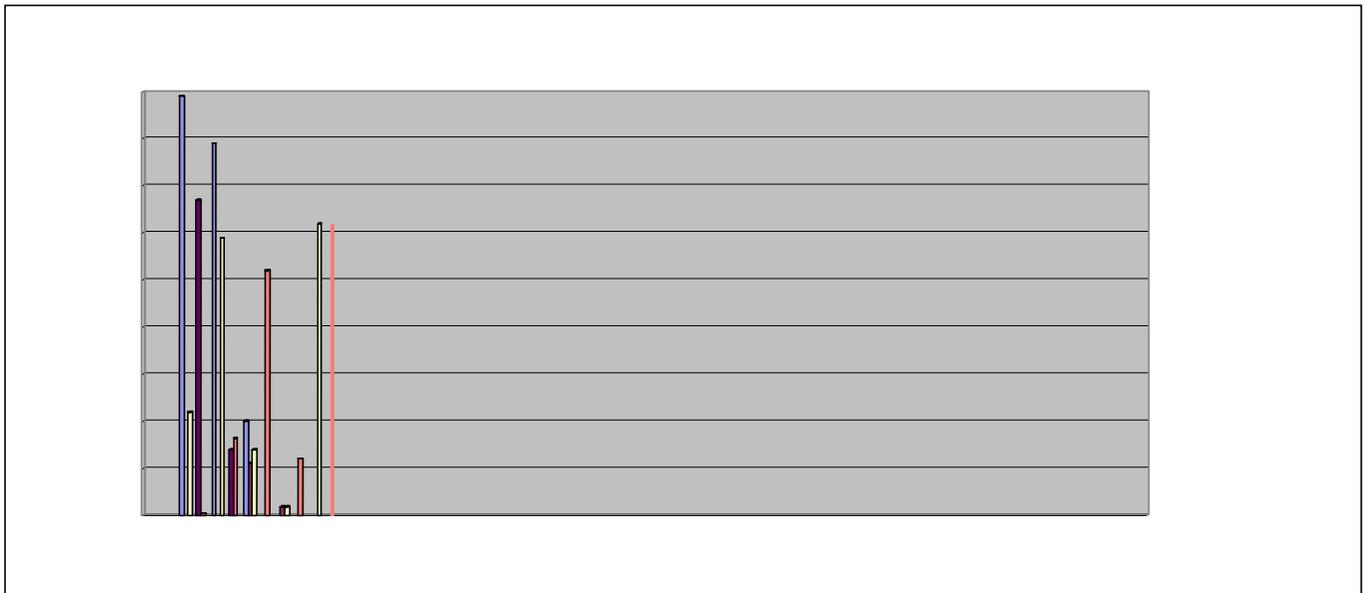


Fig. 1. Precipitation during the growing season of 2005

Fig. 2. Precipitation during the growing season of 2006

$$K = e^{-0.014 \times (h-6)}$$

during normal sprinkling:

Fig. 3. Precipitation during the growing season of 2007

$$K = e^{-0.047 \times (h-6)}$$

In this case, we used the density and PPV determined by us, which are respectively equal: 2005 - $\alpha = 1.45$, $\beta = 32\%$; 2006 - $\alpha = 1.45$, $\beta = 32\%$; 2007 - $\alpha = 1.45$, $\beta = 32\%$.

The data obtained are approximated by a curve true for heavy loamy soil and average rainfall intensity in the study area.

The experimental curve of the coefficient of utilization of precipitation K with a reliability of 0.98% is described with pulse sprinkling by the formula:

We found that the intensity of water supply during the study period exceeded the intensity of water consumption. On the option of round-the-clock irrigation, the coefficient of

excess of the intensity of water supply over water consumption is 0.72-0.80, with normal sprinkling - 0.99. Under the conditions under consideration, the total evaporation with a security of 95% is 38 m³ / ha day.

In fig. 4. graphs of average evaporation are presented for the experimental options for April - September 2005-2007.

Mm

Fig. 4. The average daily evaporation in 2005-2007

Table 1

Indices of irrigation regime during the vegetation period of plants

Options Years Atmospheric precipitation, mm
 Productively used precipitation, mm Number
 of irrigations Irrigation rate, m³ / ha

Micro-sprinkling irrigation of self-oscillating
 action (IMDAD) 2005 383 272 73 1570

2006 359 215 92 2130

2007 198 139 122 1630

Furrow irrigation 2005 383 177 5 3712

2006 359 112 6 4887

2007 198 74 6 4253

Advantage e

This method has become more widespread regulation of the water regime of the soil. With traditional methods of irrigation, reaching critical parameters of soil moisture (65% PPV.) Is a signal to start watering. Continue it until the soil is completely saturated, i.e. up to 100% PPV. The

consequence of this is that in the pre-irrigation period, plants suffer from a water shortage, and at the end of watering and for some time after it, they lack soil air. Irrigation systems with sprinkling (SIDAD) allow irrigation with significant fluctuations in the water balance of the soil. Using strain gauge posts, an evaporimeter and simple calculations, it is possible to keep the soil moisture fluctuation within 75-85% of HB. This means that the range of these variations is 3-3.5 times less than with traditional irrigation. With the help of the sprinkling irrigation system and the agrotechnical potential that this system brings to practice, it is possible not only to maintain soil moisture at an optimal level, but also to artificially lower it into certain phenophases of plant development.

Lowering the soil moisture in the garden during flowering increases the percentage of productive ovary. A more intense water regime during the differentiation of fruit kidneys also, according to some researchers, contributes to an increase in the number of generative kidneys.

During the irrigation period, on options for micro-sprinkling, the deviation of soil moisture from the required level (90% of the WSP) was due to meteorological factors. In fig. expressed that using IDAD soil moisture can be maintained at the required level. The exception is the months when the rainy period comes.

Between April and September, the rains fell relatively unevenly and in small quantities.

In certain periods of the irrigation season, soil moisture stabilized at the required level. The obtained data on soil moisture are given in table 2-5.

Thus, micro-sprinkling with the use of SIDAD allows maintaining soil moisture at a given level, which has a beneficial effect on growth processes and crop formation.	Micro sprinkling using a self-oscillating apparatus 24.5
	27.0
	26.9
In the formation of agricultural crops, the microclimatic effect created by micro-sprinkling is also of great importance.	27,2
	26.8
Irrigation causes a change in the heat exchange of the soil with air in the direction of its decrease. Changes in heat transfer under the influence of irrigation are associated with a change in the microclimatic regime in the surface soil layer, which in turn affects the growth and development of plants. So, for example, plants may lack moisture in high soil moisture. The duration of the effect of irrigation by sprinkling on the microclimate of the surface air layer depends on climatic conditions, the size of the irrigated area, and also the irrigation technique and technology.	27.0
	26.9
	27.0
	27.1
	27.0 26.5
table 2	Furrow irrigation 24.5
Soil moisture on the test options, in% of the weight of a.s.p. 2005 year	28.9
	23.8
Options 08.4 20.4 03.5 23.5 15.6 02.7 25.7 19.8 28.8 14.9	29.1
	24.4
	28.7
Micro-sprinkling using a self-oscillating apparatus 23.1 24.0 27.2 26.1 25.8 26.0 26.4 25.9 26.3 25.5	23.9
	29.5
	23,2
	28.6 24.0
Furrow irrigation 23.1 24.0 29.0 28.0 25.4 29.0 25.8 22.6 29.5 30.0	
	Table 4
Table 3	Soil moisture on the test options, in% of the weight of a.s.p. 2007 year
Soil moisture on the test options, in% of the weight of a.s.p. 2006	
Options 26.5 01.6 11.6 26.6 11.06 20.7 28.7 01.8 10.8 18.8 24.8	Options 01.4 15.4 24.4 10.5 23.5 06.6 20.6 08.7 20.7 30.7 15.8

Micro-sprinkling using a self-oscillating apparatus 25.0 26.0 27.5 25.4 25.2 27.3 26.3 28.5 27.2 25.6 26.4

Furrow irrigation 25.0

27,2

24.8

28.6 24.5 29.0

24.4 29.6 24.8 29.1 25.0

By 15-16 hours, the air temperature in the micro-sprinkling variant was 4-5 °C lower.

Humidity in the case of pulsed sprinkling throughout the day was higher than with furrow irrigation.

The greatest gradient of air humidity between the options was observed after 10 hours, it reached 10-20% at a height of 0.6 m.

In figures 5-7. The results of measurements of microclimate parameters in the daytime are presented.

At 12-13 o'clock in the afternoon, the air temperature over a height of 1.6 m was 70–90 °C higher with the furrow irrigation variant than with the micro-sprinkler variant. This irrigation technology allows you to significantly affect the plants and their habitat almost throughout the growing season, with the exception of rainy or cloudy periods, when the natural humidity is high and the soil is sufficiently provided with moisture. In this case, watering is no longer necessary.

Fig. 5 Dynamics of soil moisture under various irrigation options, 2007

Comparison of these measurements with measurements performed with an hourly interval shows their mutual characteristic.

Micro-sprinkling allows in the hot hours of the day, by increasing the relative humidity by 10-20%, to reduce the temperature by 1.5-2.5 oC. Analyzing the foregoing, it is possible with to conclude that micro-sprinkling during the entire irrigation period increases air humidity and reduces its temperature in the daytime. Studying the effect of the long-term effects of sprinkling and microclimate on the growth and development of fruit trees is one of the objectives of our research.

Table 5

Microclimatic indicators over the apple tree
(average indicators in 2005-2007)

Duration

days, hour

Options 8 10 12 14 16 18 20 22

Micro-sprinkling with the use of a self-oscillating apparatus 16.5 19.8 26.4 18.6

65 60 55 63

Furrow irrigation 16.5 22.6 31 20.4

65 54 47 56

This irrigation technology allows you to significantly affect the plants and their habitat almost throughout the growing season, with the exception of the rainy season.

Fig. 6. Change in the dynamics of air temperature above the apple tree with various irrigation options.

Fig. 7. Change in the dynamics of air humidity over the apple tree with various irrigation options.

In the design and operation of pulsed sprinkling systems, an important element is

the determination of its technological parameters.

We theoretically calculated technological parameters with optimal water supply.

pulse micro-sprinkling in the study area (96m³ / ha day., 48m³ / ha day., 32m³ / ha day.). Moreover, compared with the existing water supply 96m³ / ha day. The technological parameters of pulsed sprinkling of self-oscillating action are changing for the better, where the specific water supply is 0.62 l / s.ha., The flow rate supplied to one device is 0.031 l / s., The accumulation duration is 483 s., The average circular intensity is 0.0037 mm / mm , watering efficiency coefficient 0.67 (tab. 6).

Technological parameters of self-oscillating pulsed micro-sprinkling systems

Table 6

NºNº

p / p

Indicators

Symbol

unit of measurement

Settlement formula or set parameters

Average daily water supply, m³ / ha

96

48

32

1 2 3 4 5 6 7 8

1 Upper pressure limit in the hydraulic accumulator P_v MPa According to the operating characteristic of the pump 0.45 0.45 0.45

2 The geometric volume of the hydraulic accumulator V_g l Design and construction 30 30 30

3 The angle of rotation on the duty cycle φ Grad. structurally 15 15 15

4 Lower pressure limit in the hydraulic accumulator P_H MPa (0.39) P_v 0.3 0.3 0.3

5 Water discharge per working cycle V_{out} l $V - P_d$ [(P_v) 0.9]

R_v R_n 15 15 15

6 Radius of action R m experimentally 22 22 22

7 Irrigation area when placed according to the triangular pattern ω_0 ha $10-42R^2$ 0,097 0,097 0,097

8 Specific water supply q l / sec. $2d - 1$, 04 0.62 0.36

9 Consumption supplied to one apparatus q_d l / s $\omega_0 q$ 0.062 0.031 0.025

10 Duration of accumulation T_n sec V_{sign}

q_d 240 483 600

11 Duration of emission T_{ws} sec V_{subs}

12 Cycle time T s $T_H + T_b$ 261 512 640

13 Average circular intensity ρ mm / min 6.10-3
q 0.0062 0.0037 0.0021

14 Number of duty cycles per revolution n 24
24 24

15 Irrigation efficiency coefficient 0.67 0.67
0.67

16 Insufficient watering coefficient 0.18 0.18
0.18

17 Over-watering coefficient 0.15 0.15 0.15

The disadvantage of the option with an average daily water supply of 96 m³ / ha is that in a relatively short time (within 10 hours) the daily irrigation rate is provided, and the inter-irrigation period lasts 14-16 hours. At the same time, the microclimatic effect of irrigation worsens, and the utilization rate of equipment decreases.

In addition, technically, there is a deterioration in the conditions of normal operation of the system due to the filling of pipelines with air during interruptions in water supply, corrosion processes intensify.

The above data indicate the economic feasibility of using synchronous pulsed sprinkling in the conditions under consideration.

The introduction of automated systems of pulsed micro-sprinkling in the foothill regions of the republic allows preserving the fertility of the earth, protecting the soil from irrigation erosion, and increasing plant productivity. All this is one of the ways to implement decisions to further intensify agricultural production, which is especially important for mining in the republic.

REFERENCES

1. B.G. Aliev ZG Aliyev - Technique and technology of low-intensity irrigation in the conditions of the mountainous region of Azerbaijan Elm Publishing House Baku 1999 220 p.
2. B. G. Aliev, Z. G. Aliyev - Irrigated agriculture in the mountainous and foothill regions of Azerbaijan. Publishing House "Ziyaya-Nurlan". Baku 2005, 330 p.
3. Aliyev B.G., Aliev I.N.- Some problems of agriculture in Azerbaijan and ways to solve them Ziyaya-Nurlan Publishing House. Baku 2004, 572p. (Azeri Language)
4. International Center for Agricultural Research in arid and arid regions (ICARDA) Irrigation regime and monitoring technique. Edited by U. Umarov and A. Karimov c. Taraz: IC "AQUA", 2002, 128 s.
5. V.F. Nosenko Irrigation in the mountains. Kolos Publishing House Moscow 1981 143 p.
6. Yu.A. Markov Irrigation of collective and household gardens of the agricultural organization Agropromizdat Leningrad 1989 64 p.